


ADVANCE ELECTRON TUBE DATA SHEET

WESTERN ELECTRIC 5591* ELECTRON TUBE

5591
MINIATURE
PENTODE
UHF

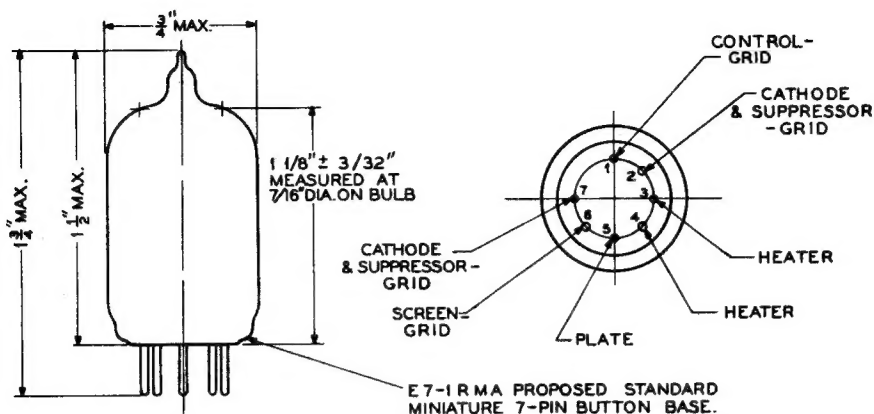

CLASSIFICATION

Miniature Pentode

MOUNTING

The tube may be mounted in any position

MAXIMUM RATINGS (DESIGN - CENTER VALUES)

Plate Voltage	180	Volts
Plate Dissipation	1.7	Watts
Screen Voltage	140	Volts
Screen Dissipation	0.5	Watts
Cathode Current	18	Milliamperes
Heater - Cathode Voltage	90	Volts
Bulb Temperature	120°	Centigrade

OPERATING CONDITIONS AND CHARACTERISTICS

Heater Voltage	6.3	6.3	6.3	Volts
Heater Current	0.150	0.150	0.150	Amps
Plate Voltage	120	150	180	Volts
Screen Voltage	120	140	180	Volts
Cathode-bias resistor	200	330	200	Ohms
Plate Current	7.5	7.0	7.7	Milliamperes
Screen Current	2.5	2.2	2.4	Milliamperes
Amplification Factor	1700	1800	3500	
Plate Resistance	0.34	0.42	0.69	Megohms
Transconductance	5000	4300	5100	Microamhos

INTERELECTRODE CAPACITANCE (WITH JAN 1A NO. 314 SHIELD CONNECTED TO CATHODE)

Control - Grid to Heater, Cathode, Screen -		
Grid and Suppressor-Grid	3.90	pF
Plate to Control-Grid	0.01	pF
Plate to Heater, Cathode, Screen-Grid and Suppressor-Grid	2.85	pF